

ESS 10010 AMPLIFIER

Analog amplifier card for variable speed drives.



SPECIFICATIONS

MECHANICAL DATA

Operating temperature	-25 to +70 degrees C
-----------------------	----------------------

ELECTRICAL DATA

Adjustments	Trimpot: R1 = null offset R2 = maximum positive R3 = maximum negative
-------------	--

Supply voltage	18-30VDC
----------------	----------

Supply current	100MA max
----------------	-----------

Adjustment range	3.5V - 11V
------------------	------------

Output voltage	+/- 0-10V
----------------	-----------

Output current	10MA max
----------------	----------

Output
configurations

4

Load

>1K ohms

Null offset
adjustment range

0- +/- 0.1V


Led

Null set-up indicator

Technical Drawings

Dimensional

All dimensions in inches and are subject to change.

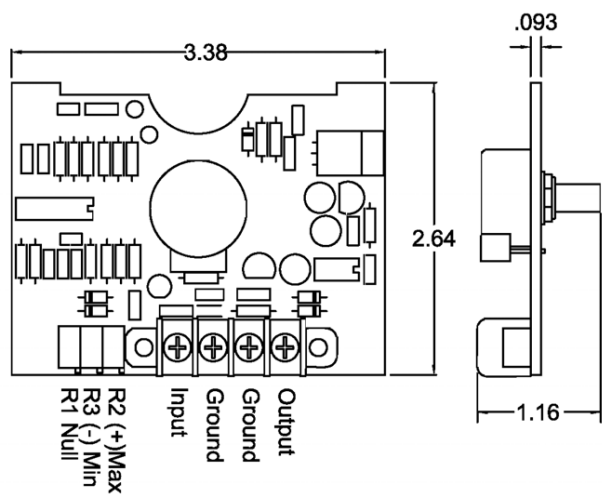

Dimensions and wiring details