

M2 MINI JOYSTICK

The M2 is a mini joystick designed specifically for bang / bang (on / off) operation. Available in single or dual axis control, this finger operated joystick is suited for use in remote control systems and applications with limited space.



SPECIFICATIONS

GENERAL DATA

# of Axis	Single or Dual
Output Options	Microswitches
Joystick Action	Spring Return
Handle Travel	+/- 28 degrees each axis
Gate	Open or Cross
Handle Compatibility	Tapered, round ball, push button or mechanical interlock
Life	3-5 million cycles each direction
Materials	High strength, glass filled nylon housing.
Est. Shipping Weight	2 lbs.

Est. Shipping
Dimensions

8 in. x 6 in. x 6 in.

MOUNTING DATA

Mounting Style	Panel (from below)
Mounting Footprint	2.5" x 2.5" See literature for additional mounting specifications

ENVIRONMENTAL DATA

IP Rating	IP54
Operating Temperature	-4 to +140 degrees F [-20 to +60 degrees C]

ELECTRICAL DATA

Contact Specifications	Switch Type: SPDT (Form C) V Series Microswitches
	Max. Number: Up to 2 per axis
	Current Rating (AC): 11A
	Voltage Rating (AC): 250
	Current Rating (DC): 6A
	Voltage Rating (DC): 12 - 24
	Termination: .187" x .20" male quick connect
	Max. Wire Size: 18 AWG


Additional
Specifications

Reference product literature for additional specifications

Technical Drawings

Dimensional


All dimensions in inches [mm] and are subject to change.

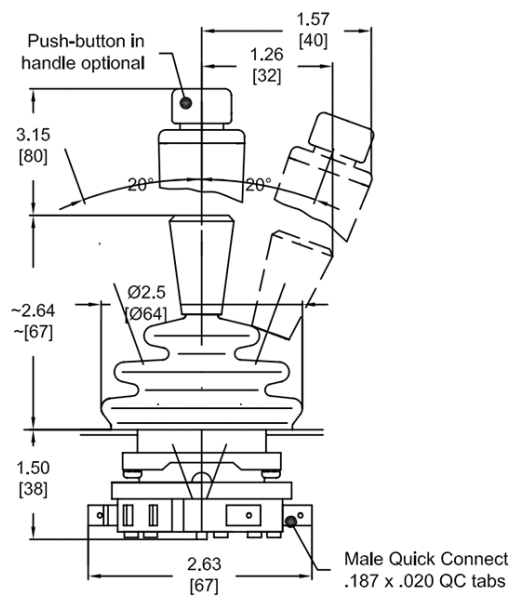

M2 overall dimensions. Shown with tapered handle and optional push button handle.

Mounting

All dimensions in inches [mm] and are subject to change.

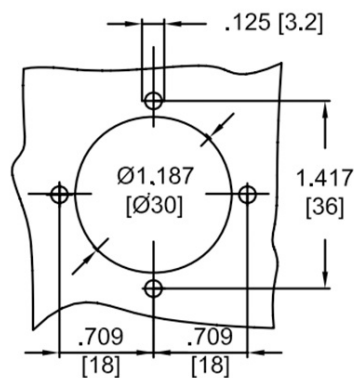

Panel mounting details (mounts from below)