

NS3 JOYSTICK

This joystick has a special console design enables activation of electronic elements such as Hall sensors and potentiometers and the use of up to three switch contacts.



SPECIFICATIONS

GENERAL DATA

# of Axis	Single, Dual or Three* *Third axis is achieved via a twist handle function or thumbwheel.
Output Options	Hall-Effect, Potentiometer, ProfiBus & ProfiNet
Joystick Action	Spring Return
Handle Travel	+/- 26 degrees each axis
Gate	Open or Cross
Life	20 million cycles

MOUNTING DATA

Mounting Style	Drop-in
----------------	---------

ENVIRONMENTAL DATA

IP Rating	IP54
-----------	------

Operating Temperature	-13 to +140 degrees F [-25 to +60 degrees C]
--------------------------	--


ELECTRICAL DATA

Additional Specifications	Reference product literature for additional specifications
------------------------------	--

Technical Drawings

Dimensional


All dimensions in mm and are subject to change.

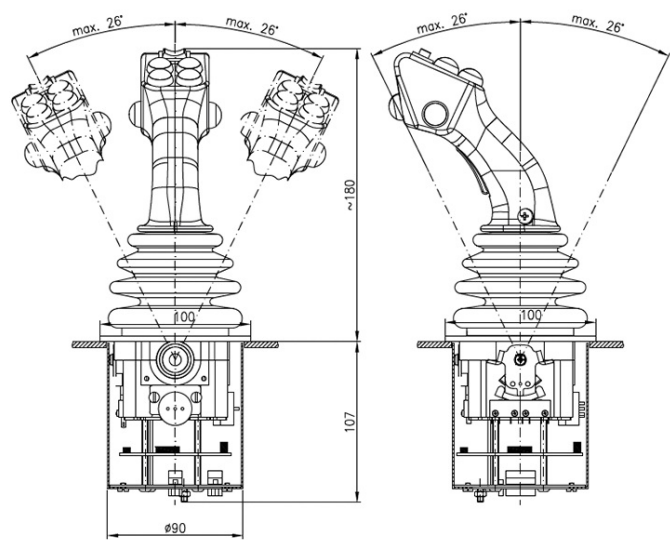

NS3 dimensions

Mounting

All dimensions in mm and are subject to change.

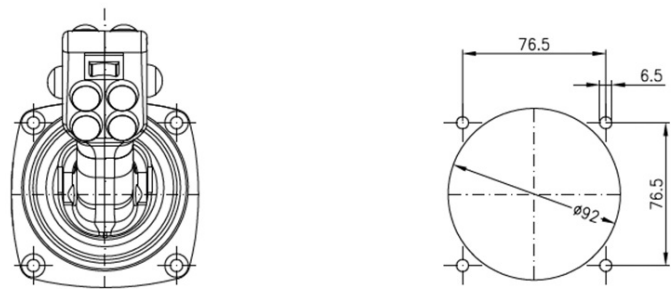

NS3 mounting dimensions